


WAFER TYPE BUTTERFLY VALVE (Industrial Pattern)

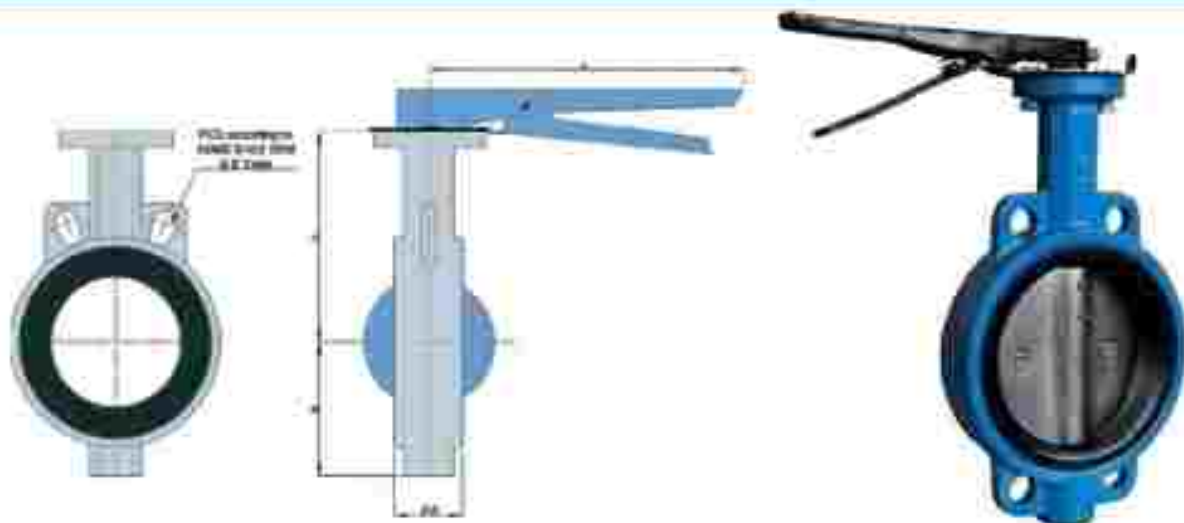

SIZE		F-F	A	B	L	MOUNTING FLANGE PCD
MM	INCH					
40	1 1/2"	23	87	57	215	F05
50	2"	43	112.5	58.5	215	F05
60	2 1/2"	48	111	72	215	F09
80	3"	48	124	74	215	F09
100	4"	62	153	90.75	263	F07
125	5"	68	168.5	108.3	263	F07
150	6"	55	189.5	121.9	263	F07
200	8"	60	233	159	300	F07
250	10"	68	277	200	GEAR OPERATED	F10
300	12"	78	305	231		F10
380	14"	92	320	272		F12
400	16"	102	385	302		F14
450	18"	116	405	326		F14
500	20"	127	485	406		F18
600	24"	154	540	480		F18

(All dimensions are in mm)

NOTE:

- > Dimensions 'A', 'B' and 'L' given are approximate values.
- > Due to continuous improvements, dimensions are subject to change. Please confirm the dimensions while placing orders.

Material:

Body: CI, WCB, CF8, CF8M

Disc: CI, SG IRON, CF8, CF8M

Seat: Nitrile / EPDM / Viton / Silicon / Hypalon

Handle: Sheet metal

Salient features:

1. Design standard: As per IS 13095, BS 5155, API 609
2. Testing standard: As per API 598, ISO 5208
3. Available in Gear, Pneumatic & Electric actuation.
4. Actuator Ready Series for on-site actuation.
5. Low Torque
6. Aesthetic looks.